


Model No.	Parts no. ①	
	Material	Surface Finish
GUR□□□-B	S50C	Black Dyed
GUR□□□-N		Ni-Plating

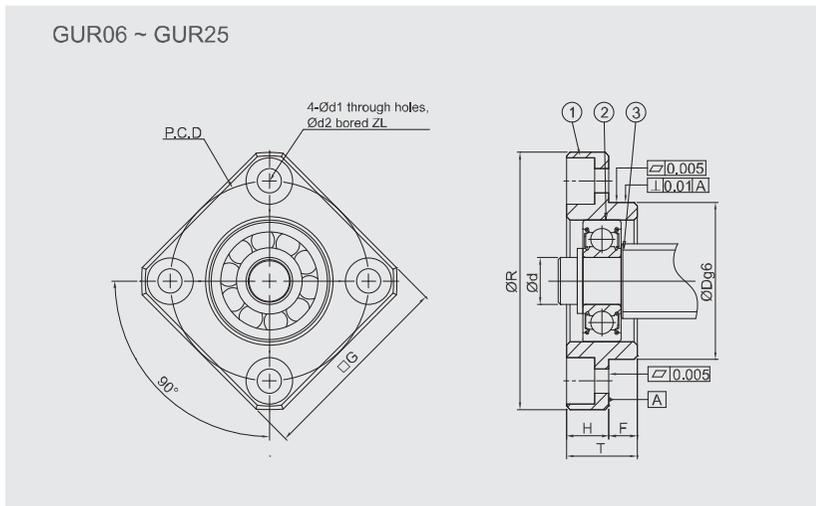

Specification

Standard Type	Dimensions									
	Ød	ØR	□G	T	H	F	ØDg6	PCD	Ød1	Ød2
GUR06-□	6	36	28	10	6	4	22 ^{+0.017} / _{-0.009}	28	3.4	6.5
GUR10-□	10	43	35	12	7	5	28 ^{+0.007} / _{-0.010}	35	3.4	6.5
GUR12-□	12	52	42	15	7	8	34 ^{+0.010} / _{-0.010}	42	4.5	8
GUR15-□	15	63	52	17	9	8	40 ^{+0.009} / _{-0.010}	50	5.5	9.5
GUR20-□	20	85	68	20	11	9	57 ^{+0.011} / _{-0.010}	70	6.6	11
GUR25-□	25	98	79	24	14	10	63 ^{+0.010} / _{-0.010}	80	9	14

Ordering Example	GUR	10	N	J
	Model No.	Shaft Dia.	Surface finish	Bearing category



GUR-B

GUR-N




Components

No.	Parts	Material	Q'ty
①	Main housing	S50C	1
②	Bearing	SUJ2	1
③	Snap ring	SWB	1

- Bearing filled with proper lithium soap lubricant maintenance free.
- Bearing with two steel covers in black dyed.
- Bearing with two touch-type plastic covers in Ni-plating.

Recommended processing dimensions of shaft

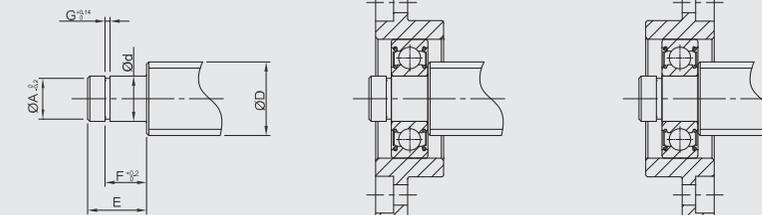

Unit : mm

	Recommended processing dimensions of shaft						Snap ring
	Ball Screw Shaft O. D.	Shaft End Diameter	Groove sizes machined for snap ring				
Z	ØD	Ød	ØA	E	F	G	
4	8	6 ^{+0.002} / _{-0.002}	5.7	9	6.8	0.8	S 06
4	12 / 14 / 15	8 ^{+0.002} / _{-0.002}	7.6	10	7.9	0.9	S 08
4	14 / 15	10 ^{+0.002} / _{-0.002}	9.6	11	9.15	1.15	S 10
5.5	18 / 20	15 ^{+0.002} / _{-0.002}	14.3	13	10.15	1.15	S 15
6.5	25 / 28 / 30	20 ^{+0.002} / _{-0.002}	19	19	15.35	1.35	S 20
8.5	30 / 32 / 36	25 ^{+0.002} / _{-0.002}	23.9	20	16.35	1.35	S 25

* Fixed Side spec please refer to P.44~P.45